

# Specification

Model	UD-16RLC+	UD-16R2LC+	UD-18RLC+	UD-18R2LC+	UD-18R8BE	UD-21R2LC+	UD-25R2LC+	UD-32R2LD+	UD-32R8BE
Printing Width	1,600mm		1,800mm			2,100mm	2,500mm	3,200mm	
Printhead Config.	I3200-E1		1	2	4	2		4	
X Direction Config.	Steel Strip + Bearing				Linear Rail	Steel Strip + Bearing			Linear Rail
RIP					Photoprint / Maintop				
Power	3,300W		3,400W		7,000W	3,600W	5,600W		5,350W
Machine Size(mm)	2,820*640*1,420		3,080*640*1,420		3,280*920*1,720	3,380*640*1,420	3,780*640*1,420	4,480*640*1,420	4,480*920*1,225
Packing Size(mm)	2,900*740*910		3,190*1,100*910		3,380*1,090*940	3,490*740*910	3,890*740*910	4,590*740*910	4,590*1,100*920
N.W. / G.W. (kg)	200/360		204/381		288/448	225/413	242/443	344/587	344/587
Feeding & Takeup	Double Bar Feeding(80kg)	●	●	●	●	●	√	√	√
	Brackets Feeding(40kg)	√	√	√	√	√	●	●	●
	Single Bar Takeup(80kg)	×	×	×	×	×	●	●	●
	Brackets Takeup(40kg)	√	√	√	√	√	●	●	●

√ Standard


× No Option

● Option


		I3200-E1 * 1	I3200-E1 * 2	I3200-E1 * 4
Output (m <sup>2</sup> /hr)	Draft 2pass	52	103	206
	Standard 3pass	34	68	136
	Quality 4pass	26	52	104
	H.Quality 6pass	17	34	68
	Backlit 8pass	13	26	52



\* Data are obtained from 1.8m, and they vary in different printer width.

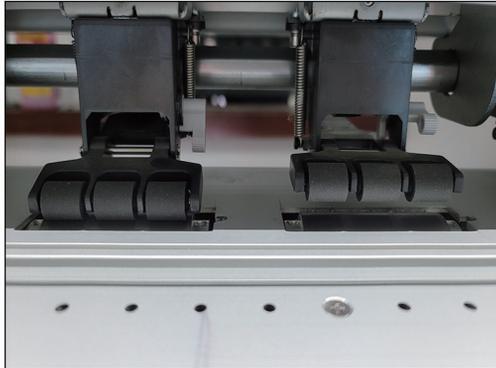

Individually Operating Pinch Roller

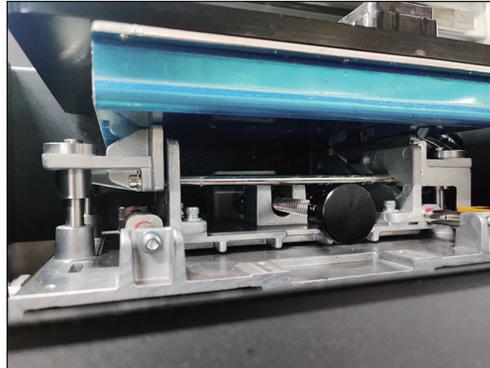

Robustic Cap Station



Digital Control Panel



Cartridge - Neat and Tidy



Feeding System for Vinyl and Banner



Take-up System for Vinyl and Banner



環球飛騰  
www.ud-printer.com


TEL : +86-752-3737218

FAX : +86-752-3737219

E-mail : info@ud-printer.com

Postcode : 516211

Address : Huiyang Economic Development Zone, Huizhou City, Guangdong, P.R.China





# GALAXY

## L2+ Series



# GALAXY

## BE Series



Bring Forth The New Through The Old

Working's as easy as 1-2-3

With Galaxy printers to save your time and steps